


SLJM-10 油壓起道機


- 可獨立操作，高機動性。
- 低爪位。
- 最少施力，方便操作。
- 鋁合金本體，重量輕。

Lifting Jacks

- ※ Self-contained models for maximum versatility.
- ※ Low toe heights fit in tight clearances.
- ※ The lowest handle effort for easy operation.
- ※ Alluminum body, the lowest weight for reduced back injuries

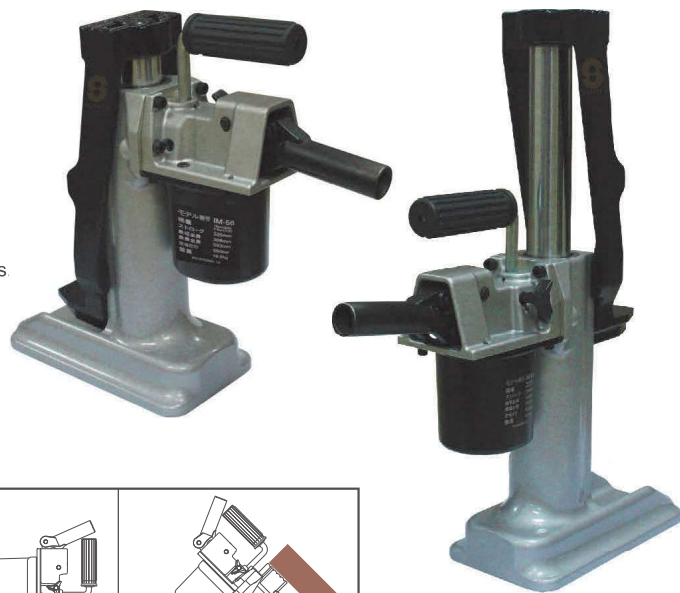

適用性 Application


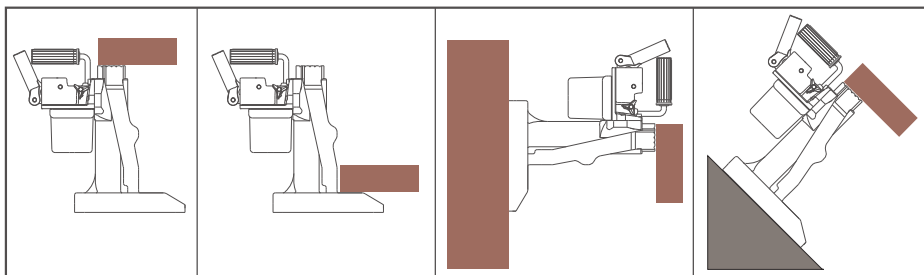


SLJM10-A04 強力爪塊 Strong Toe-Lift

優點：一體成型鑄造，耐荷重，不易變形、斷裂。

Advantage: Casting integral, heavy duty, not easily deformed and fracture.

型號 Model No.	每操作衝程 stroke for per moving (mm)	全負載時 桿最大出力 Handle capacity at fully loading (N)	油箱容量 Oil tank (c.c)
SLJM-10A	3.6	360	800
SLJM-15	4.0	365	800

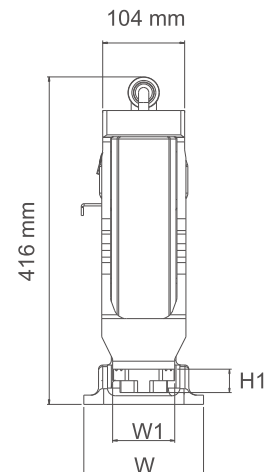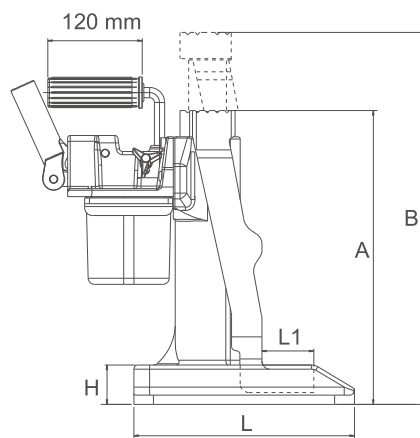

※專用操作桿80cm。

型號 Model No.	頂部荷重 Top cap. (ton)	爪部荷重 Low toe-Lift cap. (ton)	揚程 Stroke (mm)	本身高 Min. Height A (mm)	伸長總高 Ext. Height B (mm)	底座尺寸 Base Dimensions L x W x H (mm)	頂爪尺寸 Top Toe-Lift Dimensions L1 x W1 x H1 (mm)	總重 Weight (kg)	使用壓力 working press Rang (bar)
SLJM-10A	10.0	8.5	225	373	598	280 x 152 x 50	66 x 79 x 30	19.8	560
SLJM-15	15.0	15.0	225	373	598	280 x 152 x 50	100 x 50 x 30	21.6	560