

## SPA-554TQJ 氣動油壓泵浦

- 兩段式高效能泵浦。
- 空氣驅動壓力3~8bar。
- 最大輸出壓力：700bar。
- 外部調壓。
- 4hp強力馬達。
- 內建式回油釋放閥保護油壓工件。
- 適用於各種液壓舉升工具。
- 不銹鋼框架便於提運。


### Hydraulic Air Pump

- ※ 2-speed pump drives single -or double-acting cylinders, delivering a high volume of oil .
- ※ Air is the preferred source of power which supply require 3~8bar.
- ※ Max.Pressure : 700bar.
- ※ External adjustable pressure regulator
- ※ Powerful 4 hp motor starts under load.
- ※ Retract side internal relief valve protects tool.
- ※ Just use with Hydraulic lift applications.
- ※ Stainless frame easy to carry.




#### 典型配置 單動油壓缸配置

Typical Set-up  
Hook-up for single-  
acting cylinders.

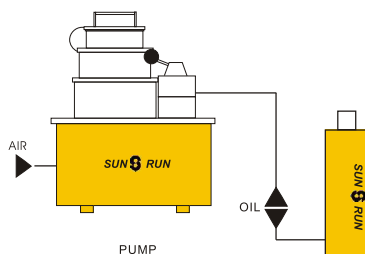

#### 典型配置 雙動油壓缸配置

Typical Set-up  
Hook-up for double-  
acting cylinders.

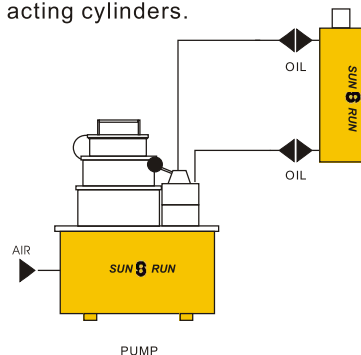



#### 選配

Pressure Gauge



G=充油式壓力錶  
Pressure Gauge

| 泵浦基本閥型<br>BASIC PUMP VALVE    | 適用油壓缸<br>Used with cylinder |   | 閥作用<br>Valve Function |   |   |
|-------------------------------|-----------------------------|---|-----------------------|---|---|
|                               |                             |   |                       |   |   |
| 手動三口方向閥<br>Manual 3 way Valve | ●                           |   | ●                     | ● | ● |
| 手動四口方向閥<br>Manual 4 way Valve |                             | ● | ●                     | ● | ● |

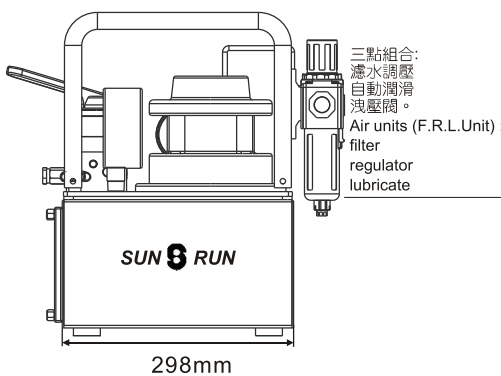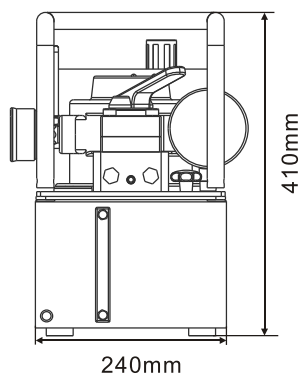

| 型 號<br>Model Number | 泵浦速度<br>Pump Type | 噪音值<br>dBA at Idle and 700bar | 馬達<br>Motor<br>kW (hp) | 適 用<br>油壓缸<br>Used with cyl.       | 流量<br>Flow rate<br>@115VAC(L/min) |          |           |           | 油箱<br>Oil tank<br>(L) | 重量<br>(含油)<br>Weight (with oil)<br>(kg) |
|---------------------|-------------------|-------------------------------|------------------------|------------------------------------|-----------------------------------|----------|-----------|-----------|-----------------------|-----------------------------------------|
|                     |                   |                               |                        |                                    | 0 (bar)                           | 50 (bar) | 350 (bar) | 700 (bar) |                       |                                         |
| SPA-554TQJ          | 雙速<br>TWO-Speed   | 85/90                         | 2.2 (4)                | 單動或雙動<br>Single- and Double Acting | 12.0                              | 7.1      | 2.0       | 0.9       | 8                     | 27.5                                    |