

SPA 氣動泵浦








- 增壓效果大，故障率低。
- 鋁合金設計輕便高效率。
- 噪音低，適用範圍廣泛。
- 多重過濾減低污染損壞。
- 旋轉接頭便於連接液壓工具及操作。
- 三位踏板控制液壓缸前進、持壓及回復操作。
- 已安裝空氣接頭，方便操作。

Air Hydraulic Pumps

- ※High efficiency in pressure buildup, low breakdown.
- ※High pressure output, light weight by aluminum Alloy design.
- ※Extensive use for customers and lower noise.
- ※Multi-filters reduce contamination and damage.
- ※Swivel coupling simplifies hydraulic connection and pump operation.
- ※Three-position treadle provides cylinder advance, hold and retract operation.
- ※Equipped with air coupler, easy for using.



旋轉接頭，便於連接
Swivel coupling

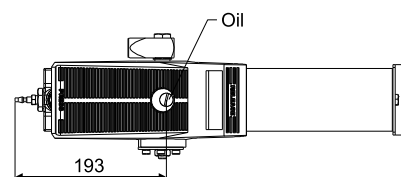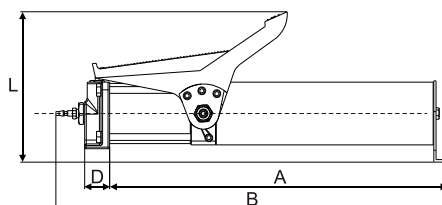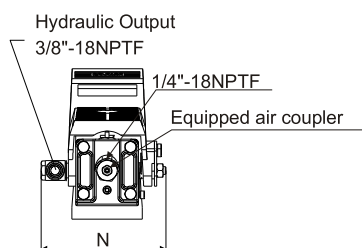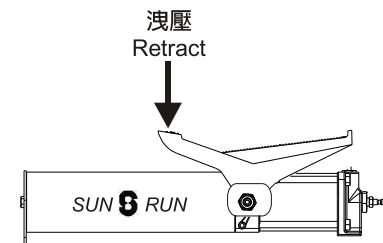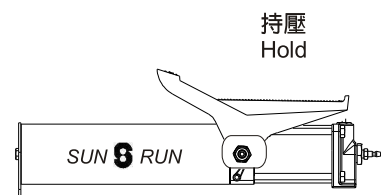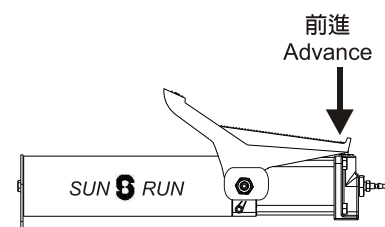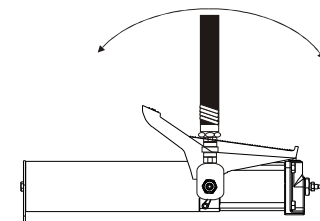

型 號 Model Number	適 用 油壓缸 Used with Cylinder	儲油量 Usable Oil Capacity (c.c.)	輸出壓力 Pressure Rating		使用空壓 Air Pressure Range (kgf/cm ²)	輸出油量 (無荷重) Output Flow Rate (noload) (c.c./min)	外型尺寸 Dimensions(mm)					壓縮比 Compression Ratio	重量 (含油) W.t (include oil) (kg)
			(bar)	(psi)			A	B	D	L	N		
SPA-70F	單動 Single Acting	800	700	10,000	6-10	450	432	500	32	192	159	1:100	7
SPA-70FL		1200	700	10,000	6-10	450	542	610	32	192	159	1:100	7.5