

SPE-200RINC-SERIES

SPE-200RINC- 超高壓電動泵浦

- 無刷馬達噪音更低、體積輕巧。適合於配套螺栓拉伸器、造船、風電等現場作業。
- 特殊馬達研發，產品更耐久，使用壽命更延長。
- 外部調壓更易操作。
- 壓力到達則馬達自動停止且持壓。
- 高低壓二段式自動切換，系統效率高。

High Pressure Hydraulic Electric Pump




- ※ The adoption of a brushless motor reduces the noise remarkably.
- Lightweight, compact, and easy to transport .Ideal for site work such as bolt rensoner work, shipyard and civil engineering construction.
- ※ The durability has been improved while the performances are maintained.
- ※ Equipped pressure switch more easy to control.
- ※ Motor auto stop working and hold pressure as reach setting pressure .
- ※ Automatic high-low pressure switching for improved work efficiency.

*壓力錶以及壓力開關為SPE-200RINC-專用，如需搭配其它系列產品混用請諮詢本公司。

*The pressure gauge and switch areexclusive to theSPE-200RINC-series.
Consult us when them with otherseries.



SPE-200RINC-

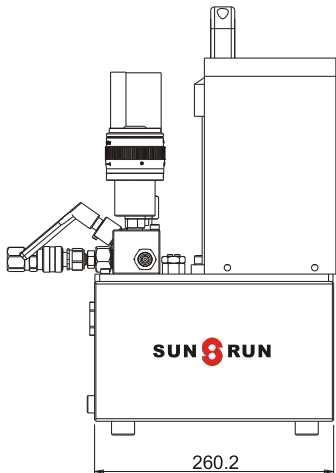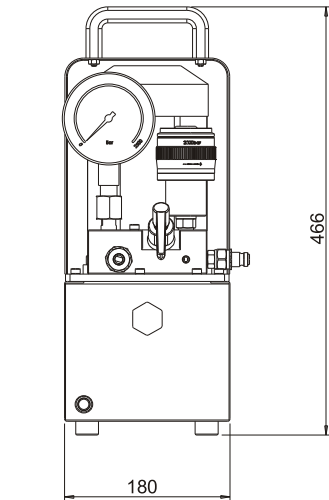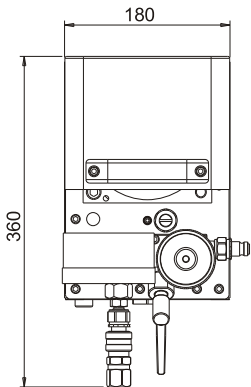

電泵型號選擇：Custom build your Electric Pump:

SPE-200RINC-2143C

1 2 3 4 5 6

1.馬達

200RI=0.625HP(0.5kw)

1.Voltage

200RI=0.625HP(0.5kw)

2.電壓/安培

1=110V/12A
2=220V/7A

2.Voltage/A

1=110V/12A
2=220V/7A

3.相數

1=1ph

3.Phase

1=1ph

4.油箱

4=4L

4.Reservoir

4=4L

5.閥門樣式

3=手動三口二位控制閥

5.Valve

3=3way/ 2position Manual Valve


6.配件

C=線控裝置
G=油壓錶

6.fitting

C=Remote control
G=Pressure Gauge

SPE-200RINC- 2143C

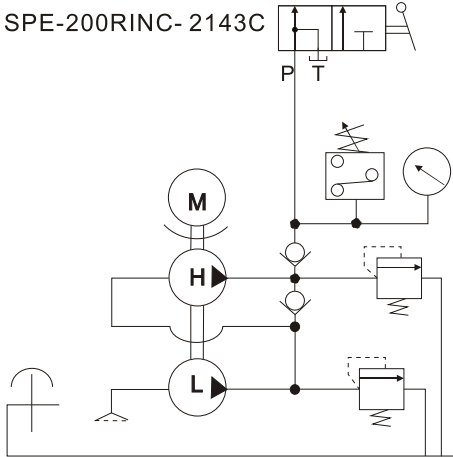

型 號	馬達	最大使用壓力	輸出壓力		輸出油量		重量 (含油)
Model Number	Motor	Max.Pressure	Pressure Rating (psi)/(bar)		Output flow rate (L/min)		Weight (include oil)
	kW(hp)	(psi)/(bar)	1 st stage	2 nd stage	1 st stage	2 nd stage	(kg)
SPE-200RINC-	0.5(1.5)	29,000(2000)	435(30)	29,000(2000)	2	0.1	19