

SPE-3000 SERIES

SPE-3000

- 省電易攜帶，操作簡便。
- 適用各類型操作場合。
- 提把與外殼一體成型。
- 均附有10呎線控裝置。
- 碳刷馬達，頻繁啟動耐操控。

電動油壓泵浦 Hydraulic Electric Pump

- ※ Requires less energy, simple and easy to operate.
- ※ Suitable for any industrial application.
- ※ Handle and casing built together.
- ※ Equipped with 10ft remote line.
- ※ Carbon brush motor, working frequently.

電泵型號選擇：Custom build your Electric Pump:

SPE-3000 **A** **1** **5** **1** **LT** **PBG**

1. 閥門樣式

1 2 3 4 5 6

- A. 常閉內建三口二位電磁閥：前進 保持 回復
- B. 常開線控自動洩壓：前進 回復
(馬達停止即洩壓，適用於衝床(打孔機)、壓鑄機或切割時使用)
- C. 手動三口二位控制閥：前進 保持 手動回復
- D. 手動四口三位控制閥：前進 保持 手動回復

2. 電壓/安培

- 1=115V/7.5A
- 2=230V/2.8A

3. Hz

- 5=50/60Hz

4. 相數

- 1=1ph

5. 油箱

- 無字樣=3000c.c PU油箱
- LT=8000c.c鐵製油箱
- ★亦可依客戶訂製

6. 配件

- PJ=壓力調整開關
- PB=外部調壓閥
- G=壓力錶

1. Valve

- A. 3way/ 2position built-in Solenoid Valve :
Advance Hold Return
- B. Remote Release Pressure :
Advance Return
(Ideal for punching, crimping and cutting)
- C. 3way/ 2position Manual Valve :
Advance Hold Manual return
- D. 4way/ 3position Manual Valve :
Advance Hold Manual return

2. Voltage/A

- 1=115V/7.5A
- 2=230V/2.8A

3. Hz

- 5=50/60Hz

4. Phase

- 1=1ph

5. Reservoir

- No word=3000c.c PU reservoir
- LT=8000c.c Iron reservoir
- ★ User can order suitable reservoir.

6. fitting

- PJ=Pressure adjust switch
- PB=Pressure adjuster
- G=Pressure gauge



SPE-3000C



LT=鐵製油箱
Iron reservoir



PJ=壓力調整開關
Pressure Adjust Switch
Part No.:SPG-800-CE80



G=充油式壓力錶
Pressure Gauge



PB=調整開關
Pressure Adjuster Switch
Part No.:SPS-7A-700

控制閥 Control Valve



單動液壓千斤頂可選用3口2位式電磁閥(內建)或手動控制閥。
建議型號：SPE-3000A(電磁閥)或SPE-3000C(手動閥)
A single-acting cylinder must be powered by a pump with a 3-way solenoid (built-in) or manual valve.


Compare Model : SPE-3000APS (solenoid) or SPE-3000CPS (manual)



雙動液壓千斤頂必須搭配具4口閥門的液壓泵浦。
建議型號：SPE-3000D

A double-acting cylinder must be powered by a pump with a 4-way valve. Compare Model : SPE-3000D

閥門樣式 Valve type

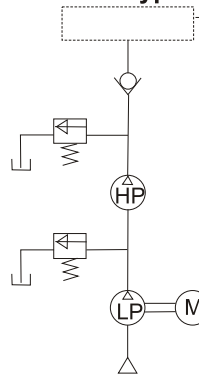

SPE-3000A

常閉內建三口二位電磁閥
Advance, Hold & Return

SPE-3000B



常開線控自動洩壓
Advance & Return

SPE-3000C

手動三口二位控制閥
Manual 3 way Valve

SPE-3000D

手動四口三位控制閥
Manual 4 way Valve



型 號	馬達	最大使用壓力	輸出壓力		輸出油量		噪音值	重量 (含油)	外型尺寸
Model Number	Motor	Max. Pressure	Pressure Rating (psi)/(bar)		Output flow rate (L/min)		dBA at Idle and 700bar	Weight (include oil)	Dimension
	kW(hp)	(psi)/(bar)	1 st stage	2 nd stage	1 st stage	2 nd stage		(kg)	(mm)
SPE-3000	0.37(0.5)	10,000(700)	200(14)	10,000(700)	4	0.4	85-90	16	250*270*400
SPE-3000 LT	0.37(0.5)	10,000(700)	200(14)	10,000(700)	4	0.4	85-90	24	300*350*460