

SPE-554TQJ 電動油壓泵浦


- 外部調壓。
- SPE-554TQ系列：適用於液壓扭力扳手工具(請參考119-121頁)。
- SPE-554TQJ系列：適用於各類液壓舉升工具。
- 3m(10ft)遙控線。
- 不銹鋼框架便於提運。

Hydraulic Electric Pump

- ※ External adjustable pressure regulator.
- ※ SPE-554TQ series: just use with Hydraulic Torque Wrench(see page119-121).
- ※ SPE-554TQJ series: just use with Hydraulic lift applications.
- ※ 3M(10 ft) remote motor control .
- ※ Stainless frame easy to carry.



SPE-554TQJ

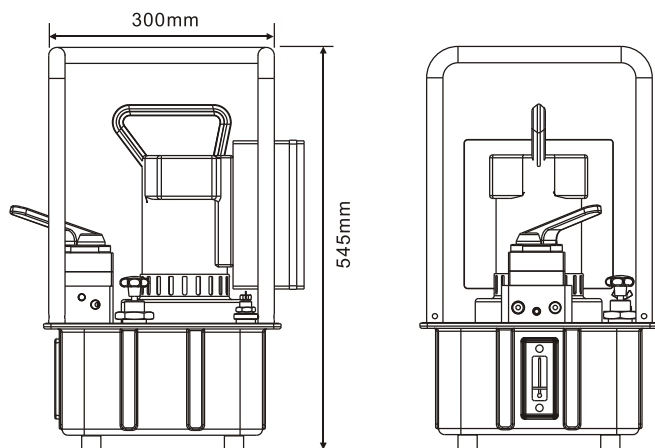

SPE-554TQJ Series

Reservoir Capacity:

8-20L

Flow at rated pressure:

11.3-0.9 L

Motor Size:

0.84kW (1-1/8 hp)

Maximum Operating Pressure:

700 bar

電泵型號選擇：Custom build your Electric Pump:

SPE-554TQJ 1 5 1 8 4 WO

0 1 2 3 4 5 6

0.樣式

TQ=扭力扳手專用
TQJ=一般舉升適用

1.電壓

1=115V
2=230V

2.Hz

5=50Hz / 60Hz

3.相數

1=1ph

4.油箱 (Lx0.26=gal)

8=8L(2.1gal)
20=20L(5.2gal)
★亦可依客戶訂製

5.閥 (僅限TQJ型使用)

3=手動三口方向閥
4=手動四口方向閥
7=三口逆止式電磁閥
8=四口逆止式電磁閥

6.選配

W=輪子
O=冷卻系統
G=油壓錶

0.Type

TQ= just use in Torque Wrench
TQJ= using in lift applications

1.Voltage

1=115V
2=230V

2.Hz

5=50Hz / 60Hz

3.Phase

1=1ph

4.Reservoir (Lx0.26=gal)

8=8L(2.1gal)
20=20L(5.2gal)
★User can order suitable reservoir.


5.Valve (just use in TQJ series)

3=Manual 3Way
4=Manual 4Way
7=Check Solenoid 3Way
8=Check Solenoid 4Way

6.Optional

W=Castor wheel
O=Cool system
G=Pressure Gauge

SPE-554 Pressure vs volume
SPE-554 壓力與流量對照

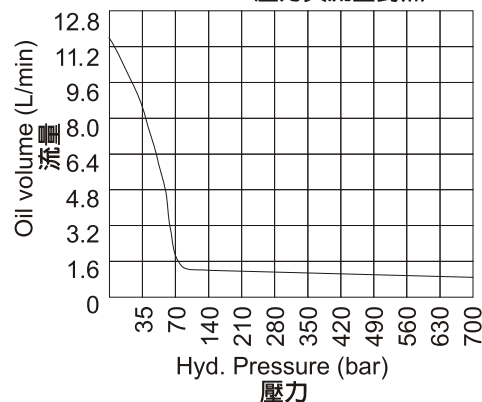

型號 Model Number	轉速 Rpm	噪音值 dBA at Idle and 700bar	馬達 Motor kW (hp)	安培 Amp at 700bar (A)	流量 Flow rate @230VAC(L/min)				油箱 Oil tank (L)	可用 油量 Usable oil (L)	重量 (含油) Weight (with oil) (kg)
					0 (bar)	30 (bar)	350 (bar)	700 (bar)			
SPE-554	12000	80	0.84 (1-1/8)	25 /110V 10.7 /230V	11.3	7.2	1.2	0.95	8	7	32