

SPM Series

Capacity:

25 ton

Stroke:

158 mm

Maximum Operating Pressure:


700 bar

SPM C型油壓床


- 可單獨機台安裝或選配安裝基座。
- 單獨機台安裝面積至少0.46m²；選配機台基座只需0.12 m²面積。
- 開放式頸部設計更易取放工件。
- 油缸有三個調整高度，高達514mm的工作空間。
- 選配基座：SPM-256CF含基座側面泵浦托架。重量34.5kg。

C Frame Shop Press

- ※ Can be bench mounted or on optional pedestal base.
- ※ Bench mount requires less than 0.46m² of space ; on optional pedestal, only 0.12 m² of floor space is needed.
- ※ "Open Throat" design makes loading and unloading of work easy.
- ※ Cylinder adjusts to three convenient working positions, providing up to 514mm of "daylight" .
- ※ Pedestal Base : SPM-256CF Provides a bracket for mounting the pump on the side of pedestal press. Wt. 34.5kg.

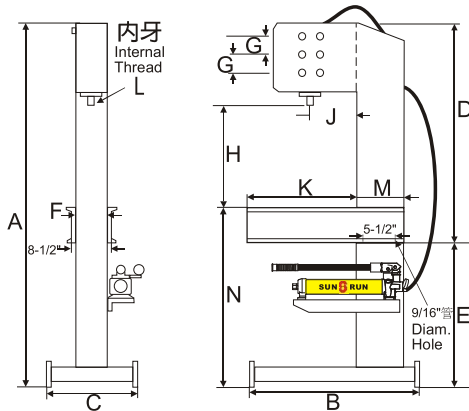

SPM-256C

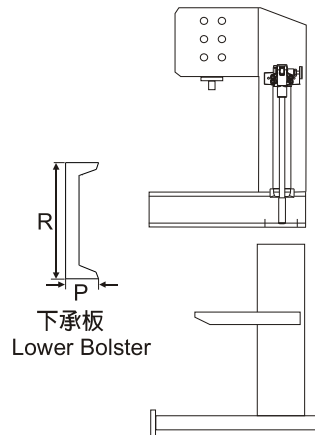

下承板
Lower Bolster

SPM-256CC

SPM-256CF



外型尺寸

H-Frame Press Dimensions (mm)

A	B	C	D	E	F	G	H(Cyl. Retracted)	J	K	L (in) 1-1/2~16	M	N	P	R	底座 Floor Space
1972	622	610	1057	914	152	127	260, 387, 514	165	318		203	1092	51	178	610*622

壓床型號 Model No.	油壓缸型號 Cylinder Model	能力 Cap. (tons)	油壓缸型式 Type of Cylinder Used	揚程 Stroke	速度 Speed(in./stroke)		泵浦 Pump type	重量 Weight (kg)
					前進 Advance	擠壓 Pressing		
SPM-256C	RSC-256	25	Single-Acting	158mm	0.129	0.03	Hand	109

標準液壓手動泵浦 (詳見型錄SPH系列)

Equipped with Hydraulic Manual Pump (reference SPH series)

型號 Model No.	有效油量 Usable Oil Capacity (cm ³)	輸出壓力 Pressure Rating		輸出油量 Oil Displacement per Stroke (cm ³)		行程 Piston Stroke (mm)	最大使用壓力 Max. Pressure (psi)/(bar)
		1 st stage	2 nd stage	1 st stage	2 nd stage		
		(bar)	(bar)	(cm ³)	(cm ³)		
SPH-1200	1200	14	700	12.5	2.8	19	10,000(700)

選配液壓電動泵浦 (詳見型錄SPE-3000系列)

Opt Hydraulic Electric Pump (reference SPE-3000 series)

型號 Model No.	馬達 Motor	輸出壓力 Pressure Rating (psi)/(bar)		輸出油量 Output flow rate (L/min)		最大使用壓力 Max. Pressure (psi)/(bar)
		1 st stage	2 nd stage	1 st stage	2 nd stage	
		(bar)	(bar)	(L/min)	(L/min)	
SPE-3000	0.5hp	200(14)	10,000(700)	4	0.4	10,000(700)

