
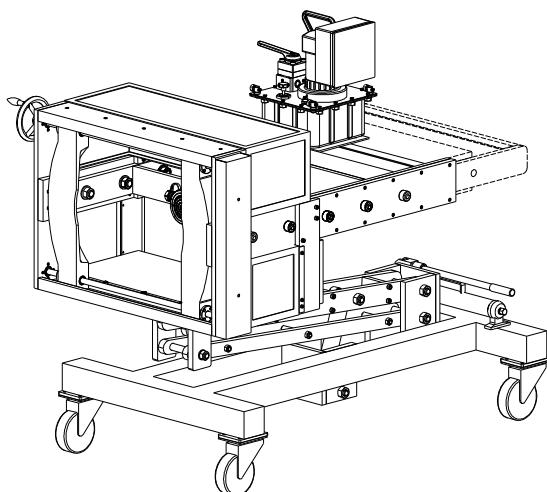


SPR-RSR5013E 移動式油壓拉拔器 Mobile Hydraulic Pullers


- 適用於拆卸培林、聯軸、齒輪和其他零件，更具效率和適用性。
- 移動式油壓拉拔器在機能及工效性上更形出色。
- 良好的穩定性、移動性和調整性。
- 最大撐開力50噸和最大撐開距離520mm。
- 安全及簡易的電動操作模式，附有遙控裝置、保護蓋和壓力錶更確保安性。

- ※ It's used for dismantling bearings, couplings, gears and other parts, with relative speed and more easily.
- ※ The Mobile Hydraulic Pullers excels through functional and ergonomic operation.
- ※ It's stable, mobile and adjustable in height.
- ※ A maximum tractive force of 50 tons can be applied with diameters of up to 520 mm.
- ※ To ensure safe and easy operation the electrical models are equipped with remote control, safety cage and pressure gauge.

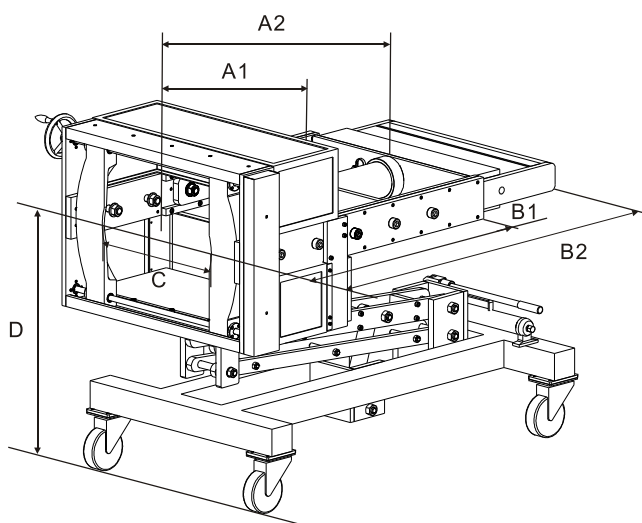

選配泵浦 Optional pump

- 手動手泵浦操作
Manual hand pump control.
- 油壓電動泵浦線控操作
Hydraulic electric pump remote control.

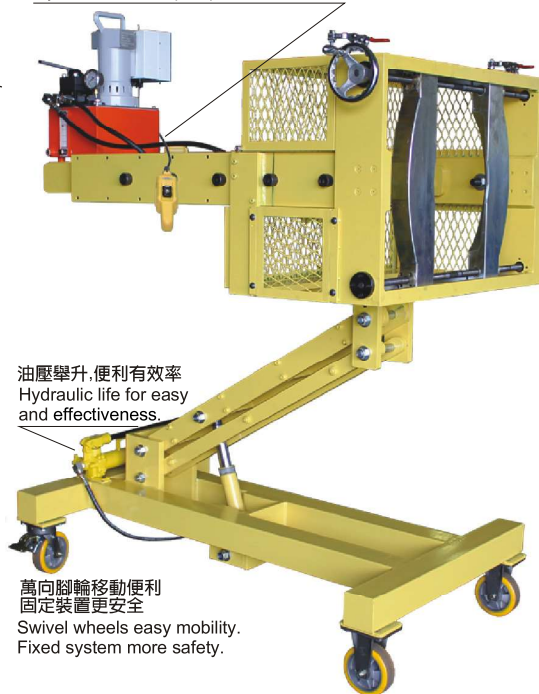

油壓舉升,便利有效率
Hydraulic lift for easy and effectiveness.

萬向腳輪移動便利
固定裝置更安全
Swivel wheels easy mobility.
Fixed system more safety.

型號 Model Number	能力 Cap. (tons)	揚程 Stroke cylinder (mm)	油壓泵浦類型 Pump hydraulic manual/electric	標準狀態 In standard position A1 (mm)	延伸狀態 In extended position A2 (mm)	框架標準狀態 Frame length in standard position B1 (mm)	框架延伸狀態 Frame length in extended position B2 (mm)	最大撐開距離 Max. Dia. C (mm)	升降高度 Set-up height D (mm)
SPR-RSR5013E	50	334	電動型雙動泵浦 Double-acting Electric Pump	790	1170	1210	1590	520	939~1469