


STP 油壓床

- 自動化焊接，結構强度高，耐用性佳。
- 千斤頂可左右移動，用途廣泛。
- 所有型號均含壓力錶及V型墊塊。

Hydraulic Presses

- ※ Automatic welding frame for maximum strength and long life.
- ※ Roller head design allows movement and lock the cylinder from side to side, suitable for different condition.
- ※ Gauges and V-Blocks are included on all models.



V型墊塊： V-Blocks


使用圓型或其他不規則材料時更得心應手

Design for easy fixturing of round or other nonuniform materials.




STP-35


STP-15

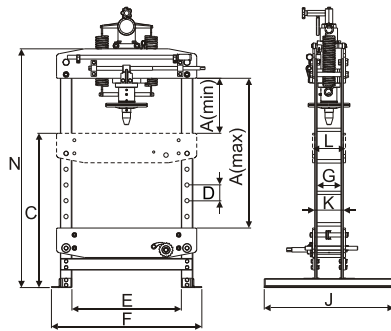

STP-15 / STP-15A

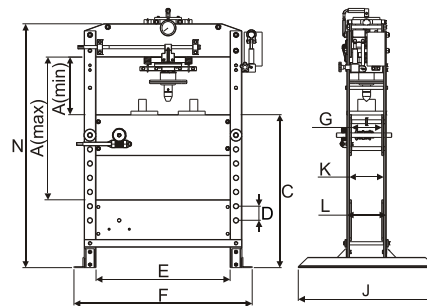

STP-35 / STP-35A / STP-35E

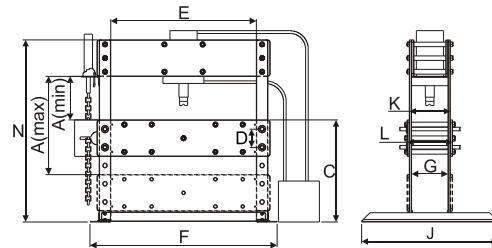

STP-60E STP-100E

型 號 Model Number	能 力 Cylinder Capacity	輔助高 Screw Stroke	揚程 Ram Stroke	使用壓力 Operting Pressure	幫浦 樣式 Press Modal Pump ₂₎	輸出油量 Output Flow Rate	外型尺寸												重量 Wt. (kg)
							Dimensions(mm)												
							A (max)	A (min)	C	D	E	F	G	J	K	L	N		
STP-15	15(148)	90	108	300	H	5c.c./once	1000	310	880	90	625	858	138	740	162	188	1510	168	
STP-35	35(335)	125	172	360	H	6c.c./once	1085	335	970	90	850	1130	192	865	217	249	1695	220	
STP-35AH ¹⁾				A & H	750c.c./min	222													
STP-35EH ¹⁾				360	E & H	8750c.c./min												250	
STP-60E ¹⁾	60(523)	—	310	70 210	E	8750c.c./min 3000c.c./min	1050	250	1350	200	1050	1380	268	1000	306	338	1900	670	
STP-100E ¹⁾	100(1010)	—	300	70 210	E	8750c.c./min 3000c.c./min	1080	480	1120	200	1600	2050	400	1500	450	500	2000	1500	

1) STP-35AH : Air pressure 7~10kgf/cm² STP-35EH : 0.5HP*110/220V*1PH STP-60E : 3HP*220V*3PH STP-100E : 5HP*220V*3PH

STP-35AH : 使用空壓 7~10kgf/cm² STP-35EH : 0.5HP*110/220V*1PH STP-60E : 3HP*220V*3PH STP-100E : 5HP*220V*3PH

2) H: by manual A: by air E: by electric H / 手動 A / 氣動 E / 電動