
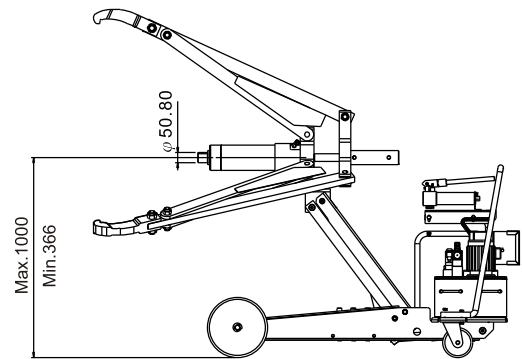
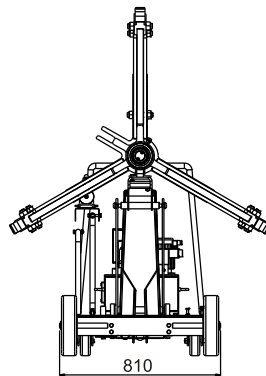



## SPRE-553C 移動式拉拔器

1. 油壓舉升更易操作，精準定位拉拔器。
2. 油壓電動泵遙控操作前進、持壓和回縮。
3. 油壓拉爪設計，藉由油壓缸動作提供現場工作安全及穩固的挾持。
4. 提供方便更換二爪或三爪的設計。
5. 可搭配揚程156mm或334mm的油壓缸。
6. 油缸自動中心校正，拉爪自動平衡挾持。
7. 強力拉力及強挾持力拉爪。不需額外鏈條或覆蓋來避免拉爪滑出或彈出。
8. 拉爪具遮護功能，能保護操作者。
9. 6"萬向車輪更便於移動。

## Mobile Hydraulic Pullers

1. Hydraulic lift system for easy, precise position of puller.
2. Hydraulic electric remote control advance, hold and retract.
3. Hydraulically-actuated jaws. Cylinder moves in or out to provide a safe, secure grip on workpiece.
4. Puller can be assembled in 2 or 3 jaws configurations.
5. Choice of cylinder with a 156(mm) or 334(mm) stroke.
6. Self centering: Center cylinder on work; puller jaws will automatically grip work.
7. Powerful pull and the tighter the puller jaws grip. No chains or cages required to keep puller jaws from slipping or springing off the part being pulled.
8. Guards at pinch points protect operator.
9. 6" swivel casters give ease of mobility.

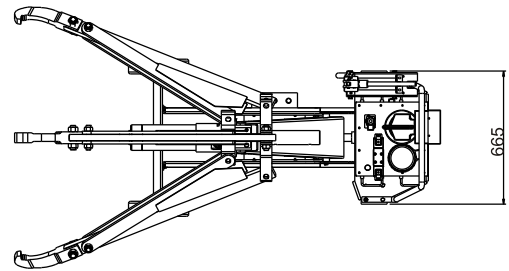

單位 Unit (mm)

| 型號<br>Model Number | 能力<br>Cyl. Capacity<br>(kN) | 揚程<br>Cyl. Stroke<br>(mm) | 爪開距離<br>Spread |           | 爪深<br>Reach to spread |           | 爪前鉤<br>Jaw Tip  |                 |                 | 重量<br>Wt.<br>(kg) |
|--------------------|-----------------------------|---------------------------|----------------|-----------|-----------------------|-----------|-----------------|-----------------|-----------------|-------------------|
|                    |                             |                           | A<br>(mm)      | B<br>(mm) | C<br>(mm)             | D<br>(mm) | L<br>A1<br>(mm) | W<br>B1<br>(mm) | H<br>C1<br>(mm) |                   |
| SPRE-553C          | 498                         | 334                       | 200            | 1380      | 488                   | 637       | 23.65           | 35.7            | 50              | 380               |